






## TRAPPES À REMPLISSAGE TYPE 1/2 P2TR, P2TR, L5TR, L6TR, M2TR CLASSE C250 avec grille anti-chute à mailles

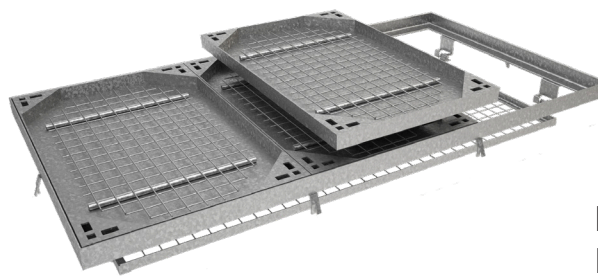

**HAUTEUR DE  
REPLISSAGE : 48mm**

### ■ Dimensions et masses

Code	Référence trappe	Disposition	Ouverture libre	A*	B*	H*	P	Masse
								mm
/	1/2 P2TRG		884 x 527	1004	647	60	48	94
/	P2TRG		1161 x 884	1004	1281	60	48	141
26672	L5TRG		1795 x 884	1004	1915	60	48	212
/	L6TRG		2429 x 884	1004	2549	60	48	274
/	M2TRG		3062 x 884	1004	3182	60	48	343
Masse d'un tampon (Kg)								53

\*Côtes extérieures cadre.


### ■ Caractéristiques

- Résistance : **250 kN**
- Grille de protection maille de 50 x 50 mm

### ■ Options

- Outils de manoeuvre

### ■ Remarque : tampon livré sans remplissage

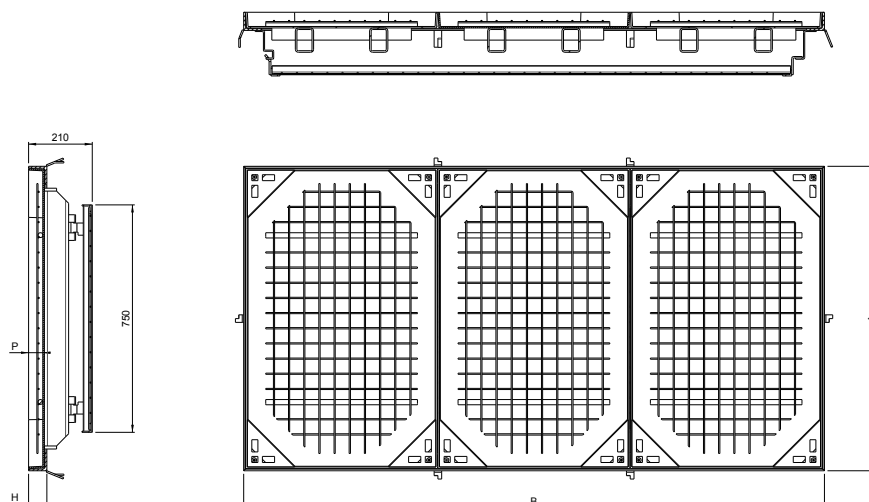

	Tampon	Cadre	Grille
Matière	Acier	Acier	Acier
Revêtement	Galvanisé à chaud	Galvanisé à chaud	Galvanisé à chaud