

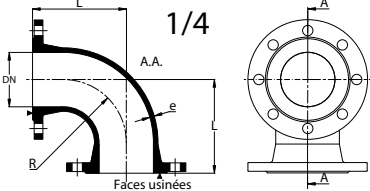
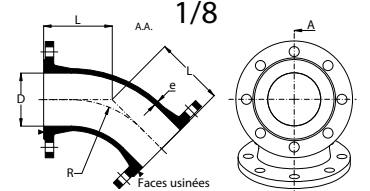
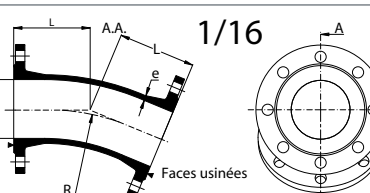


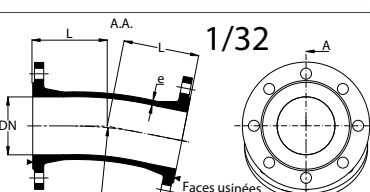

COUDES DIAMÈTRE NOMINAL > 300 A BRIDES MOBILES

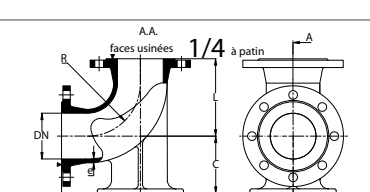

■ Dimensions et masses

Code article		Diamètre nominal DN	Longueur L	Rayon R	Patin		Épaisseur e	Masse Kg	Pression nominale					
					c	dxd			PN 10	PN 16	PN 25	PN 40		
mm											bar			
58		350	450	380	-	-	10,2	115,5	x	*				
59		400	500	425	-	-	10,8	163,5	x	*				
*		450**	550	470	-	-	19,0	230,0	x	*				
10856		500	600	515	-	-	12,0	266,2	x	*				
15955		600**	700	605	-	-	13,2	388,4	x	*				
*		700**	800	695	-	-	24,5	750,0	x	*				
97		350	298	550	-	-	10,2	99,5	x	*				
84		400	320	591	-	-	10,8	108,6	x	*				
*		450	349	650	-	-	19,0	185,0	x	*				
10857		500	375	700	-	-	12,0	197,0	x	*				
15956		600	426	799	-	-	13,2	286,0	x	*				
*		700**	478	900	-	-	24,5	485,0	x	*				
15714		350	215	729	-	-	10,2	85,4	x	*				
15715		400	239	824	-	-	10,8	106,0	x	*				
*		450**	204	650	-	-	19,0	140,0	x	*				
15716		500	272	940	-	-	12,0	157,2	x	*				
*		600	320	1131	-	-	13,2	234,0	x	*				
*		700**	284	900	-	-	24,5	245,0	x	*				
154		350	190	1218	-	-	10,2	78,4	x	*				
15718		400	205	1320	-	-	10,8	96,7	x	*				
*		450**	144	650	-	-	19,0	110,0	x	*				
15719		500	233	1503	-	-	12,0	146,4	x	*				
*		600**	174	800	-	-	22,5	195,0	x	*				
*		700**	194	900	-	-	24,5	275,0	x	*				
*		350**	450	380	270	450	16,5	200	x	*				
*		400**	500	425	300	500	17,5	300	x	*				
*		450**	550	470	330	550	19,0	355	x	*				
*		500**	600	515	360	600	20,0	390	x	*				
57		600	700	605	420	700	22,5	650	x	*				
*		700**	800	695	515	800	24,5	1000	x	*				

• Pour tout autre DN, nous consulter

* nous consulter
** brides fixes

Norme EN 545

■ Montage

Joint plat et boulons disponibles sur demande.

Le couple de serrage des boulons dépend du type de joint utilisé et de la pression nominale.

Matière	Revêtement
Fonte GS 420-5	Peinture époxy alimentaire